Frame Adjustments

Rifton Stander Size 1

Thank you for choosing the Rifton Stander system.

This quick reference guide will help you with basic adjustments.

For more details and important **▲** WARNING safety information and warnings, please consult the product manual.



KZ22 Rev.00 © 2023 Rifton Equipment



The Rifton stander system can be configured for prone or supine use. Review



the available components to determine which your stander can be used for. Additional components can be obtained from www.rifton.com. Straps have color coded tags. Use components with GREEN tags for supine

positioning, and components with **BLUE** tags for prone positioning.


To avoid falls or strangulation, always ensure the correct straps and supports are **WARNING** used in each configuration. The infographic to the left shows the minimum straps and supports required for safe positioning in prone and supine standing.

These minimum supports are denoted throughout this guide by * for supine and * for prone.

Brakes

Quick Reference Guide

Product can tip over if used **WARNING** incorrectly. Always engage brakes during transfers and standing.



Grasp the handle on top of the column,

Height Adjustment

and squeeze the white trigger to unlock and adjust the height.



WARNING

Body support tilt

To prevent falls or other injury, ensure all straps are secure and knobs tight before tilting client to a standing position.

Initial stander configuration should be done by a qualified professional.

Grasp the handle firmly and squeeze the double trigger to adjust the body support angle.





Adjust the upper trunk support height by squeezing the two white

*Upper trunk support

triggers together and moving it to the desired location.

SUPINE ONLY



SUPINE ONLY The headrest is the top section of the upper trunk support. Optional head

Headrest

laterals slide into the slots behind the headrest. Loosen the knob to adjust independently in height as well as width.



Loosen the knob behind the user's hip to adjust abduction angle, and tighten in the desired position.

Hip abduction





TIP: Align the user's hips at the labeled hip marking, then adjust


the thigh length.

Thigh length

the thigh length followed by the lower leg length. Align the center of the user's knee with the knee strap attachment points (B).

Loosen the inner knob (A) behind the leg support segment to adjust

Lower leg length Loosen the outer knob (C) behind the leg pad to adjust the lower leg length.

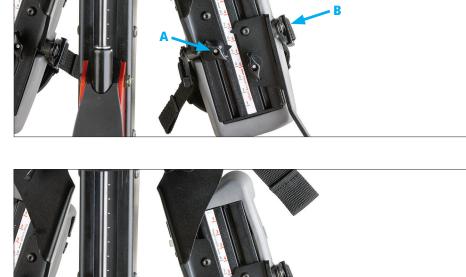



Ankle plantar flexion/dorsiflexion Use the knob on the outer side of the ankle to adjust ankle plantar

flexion/dorsiflexion.



**Sandals

The front and rear foot straps have magnetic buckles. Adjust the length of the heel cup using the velcro strap.

Loosen the knob under the sandal to rotate the sandal or move it forward



or backward.



Tray Adjustments

Trunk Laterals

Supine Hip Strap

Tray Loosen the knob that faces

forward to adjust tray height.

Tray adjustments

Loosen all three knobs that face downward to rotate and position the tray. The knob under the center of the tray also allows some angle adjustment.



Tray Height

Medial/Lateral thigh supports Mount the medial/lateral thigh


supports on the inside for medial support, or on the outside for lateral support. Adjust the width using the white trigger (A). The mounting bracket is off-center, so the pad has two possible height positions. Swap pads to change height position.





Trunk laterals

Attach the laterals either at the level of the trunk or pelvis. Adjust width using trigger (B) on side of body support. Adjust height by loosening knob (C) on the outside and moving pad up or down. The pads swing away for transfers using the white button.





All straps To attach straps to the body support, insert the tip of the clip into the correct

socket behind the body support and pull forward until it clicks. Pull the clip back and away from the pad to remove the strap.



To prevent falls or other **WARNING** injury, all users should be secured with a trunk strap (or butterfly harness in supine configuration). These straps may be used in prone or supine. The rotation control strap has a

**Trunk strap/trunk rotation

control strap

webbing loop that runs behind the pad. Close the padded strap snugly around the user, then close the buckle and tighten either side to control rotation of the trunk.





control strap These straps are used in supine

*Hip strap/hip rotation

configuration. The rotation control strap has a webbing loop that runs behind the trunk support pad. Close the padded strap snugly around the user, then close the buckle and tighten either side to control rotation of the pelvis.





Butterfly harness To prevent strangulation, **WARNING**

always attach center safety strap and make sure all straps are snug before every use. In supine standing a butterfly harness

may be used in place of a trunk strap. Use all five attachment points.





*Knee straps To prevent strangulation or **WARNING** other injury, in supine the

user's knees MUST be secured with knee straps. The knee straps clip onto the posts on

either side of the knee. Pull the strap end to tighten and pull the plastic tab to loosen before unclipping the strap.







*Pelvic harness To prevent strangulation **WARNING** or other injury, in prone standing the prone pelvic harness MUST be

used with all five attachment points secured. Use the three buckles on the right side and center when transferring the user in

and out. Tighten lower side straps first when positioning.

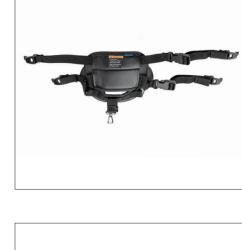


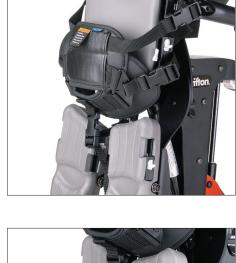

The Prone knee cuffs clip onto the posts on either side of the knee. Pull the strap end to tighten and pull the plastic tab to

Prone knee cuff

loosen before unclipping the strap.

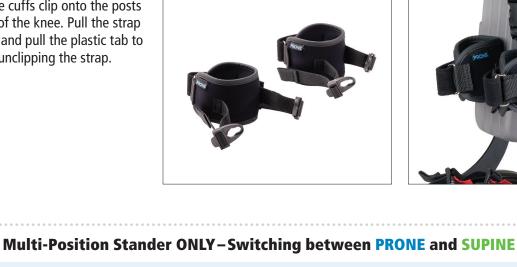



2. Switch tray direction 3. Switch to pelvic 4. Remove knee straps **harness**

Remove the supine hip

back of the trunk support. Pull the upper trunk support up and rotate it back to remove it.

Squeeze the triggers on the

1. Remove upper trunk support

> attachment knob (A), remove the tray and attach it facing the other direction. For use in

If the tray is used, loosen

prone, adjust the tray up, and the caregiver handle down and out of the way.

strap. Install the pelvic harness by attaching all 5 attachment clips.

may be added.

Optional prone knee cuffs

sandal (B), rotate it to the desired position, and tighten the knob.

5. Rotate sandals 180°

Loosen the knob under the














Grifton



other direction.



the supine hip strap (standard,

or rotation control).

4. Add knee straps Clip the knee straps onto the posts on either side of the knee.

the sandal (B), rotate it to

5. Rotate sandals 180°

Loosen the knob under